

LED High Bay Installation Guide

WARNING:

- THE PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- THE POWER SUPPLY MUST BE TURNED OFF BEFORE INSTALLATION.
- NO WARRANTY WILL BE ACCEPTED IF THIS PRODUCT IS NOT INSTALLED BY A QUALIFIED ELECTRICIAN.
- THE LIGHT SOURCE CONTAINED IN THIS LUMINAIRE SHALL ONLY BE REPLACED BY THE MANUFACTURER OR HIS SERVICE AGENT OR A SIMILAR QUALIFIED PERSON
- THE EXTERNAL FLEXIBLE CABLE OR CORD OF THIS LUMINAIRE CANNOT BE REPLACED; IF THE CORD IS DAMAGED, THE LUMINAIRE SHALL BE DESTROYED.
- DO NOT OPERATE THE PRODUCT WITH A DAMAGED LENS; THE DAMAGED LENS SHOULD BE REPLACED BY THE SERVICE AGENT.
- THE DRIVER CAN'T BE REPLACED.
- THE TERMINAL IS RATED VOLTAGE IS 300V, RATED CURRENT IS 3A, THE WRING IS NOT LESS THAN 3 X 1.0MM2.
- WHEN PRODUCTS ARE INSTALLED IN HIGH WIND ENVIRONMENTS, APPROPRIATE INSTALLATION/FASTENING METHODS MUST BE APPLIED SO THAT THE PRODUCT MOUNTING POINTS ARE NOT DAMAGED DUE TO VIBRATION, MOVEMENT OR CORROSION.
- GOOD PRACTICE DOES NOT RECOMMEND CONTINUOUS USE WITHOUT APPROPRIATE SWITCHING CYCLES.


















Product Specification


| RÉF. | Size | Wattage | Voltage | Frequency | Та |
|----------------|-----------|---------|------------|-----------|------|
| COB-BEL-135-VG | 300x270mm | 135W | AC220-240V | 50Hz | 50°C |

Installation of LED High Bay




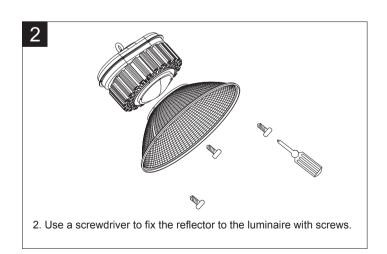

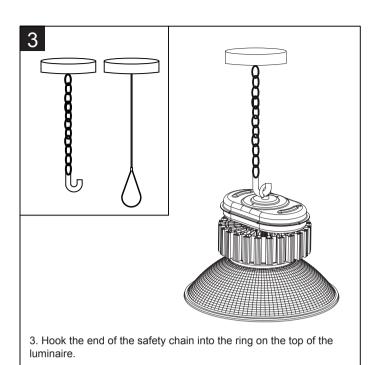



4.Individually connect the Live wire, Neutral wire and Ground wire of AC input wire to Brown, Blue and Green-Yellow wire. All cable teminations must be installed in accordance with the designed IP rating.

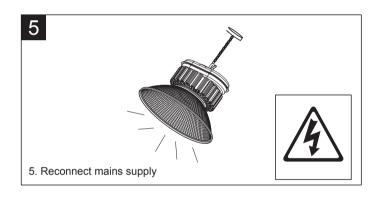

CEOTIS ECLAIRAGE C/O SOITEC

Parc technologique des fontaines Chemin des Franques 38190 Bernin France

Email:contact@ceotis.fr TEL: +33 (0)476 92 97 70