



en LED HUBLOTS PERLE Installation Guide

fr Hublots Perle LED Guide d'Installation

en


WARNING:

- THE LIGHT SOURCE CONTAINED IN THIS LUMINAIRE SHALL ONLY BE REPLACED BY THE MANUFACTURER OR HIS SERVICE AGENT OR A SIMILAR QUALIFIED PERSON.
- THE PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- THE POWER SUPPLY MUST BE SWITCHED OFF BEFORE INSTALLATION.
- NO WARRANTY WILL BE ACCEPTED IF THIS PRODUCT IS NOT INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THIS GUIDE.
- THIS PRODUCT CONTAINS A LIGHT SOURCE OF ENERGY EFFICIENCY CLASS <X>

fr

AVERTISSEMENT :

- LA SOURCE LUMINEUSE CONTENUE DANS CE LUMINAIRE NE DOIT ÊTRE REMPLACÉE QUE PAR LE FABRICANT OU SON AGENT DE MAINTENANCE OU UNE PERSONNE DE QUALIFICATION ÉQUIVALENTE.
- CE LUMINAIRE DOIT ÊTRE INSTALLÉ PAR UN ÉLECTRICIEN QUALIFIÉ.
- L'ALIMENTATION ÉLECTRIQUE DOIT ÊTRE ÉTEINTE AVANT L'INSTALLATION.
- AUCUNE GARANTIE NE SERA ACCEPTÉE SI CE PRODUIT N'EST PAS INSTALLÉ PAR UN ÉLECTRICIEN QUALIFIÉ.
- CE PRODUIT CONTIENT UNE SOURCE LUMINEUSE DE CLASSE D'EFFICACITÉ ÉNERGÉTIQUE <X>



1. en Product specification

fr Référence des produits






Model RÉF.	Size(mm) Taille	Wattage(W) Puissance	Ta(°C) Température	Light source energy efficiency class <X>	PF	Weight(kg) Poids
COH-ECO-19-28FW 34M001	ø280×75	19W	-30~+50	E	0.9	0.54
COH-ECO-19-28FB 34M001	ø280×75	19W	-30~+50	F	0.9	0.54
COH-ECS-20-28FW 34M001	ø280×75	19.5W	-30~+50	E	0.9	0.55
COH-ECS-20-28FB 34M001	ø280×75	19.5W	-30~+50	F	0.9	0.55
No. maximum de luminaire connectés au disjoncteur						
B10		B16	C10	C16		
15		24	25	42		















2. en LED HUBLOTS Installation

fr Hublots LED Installation

1

2

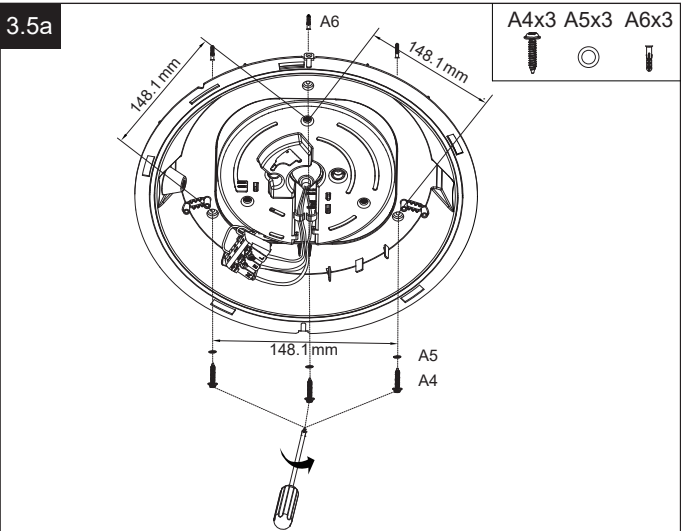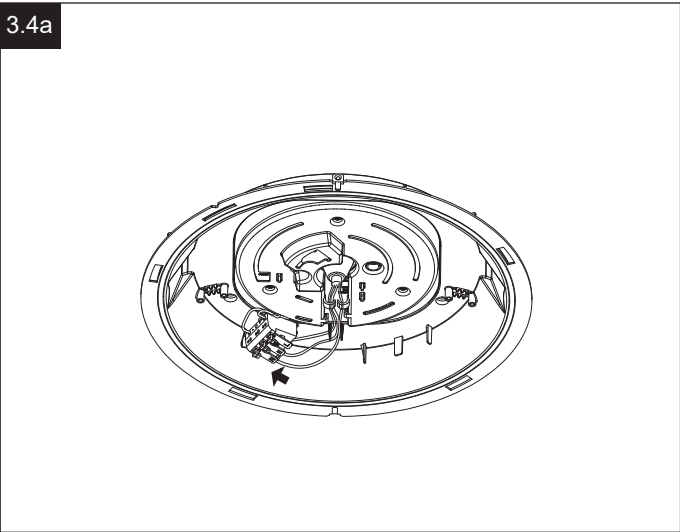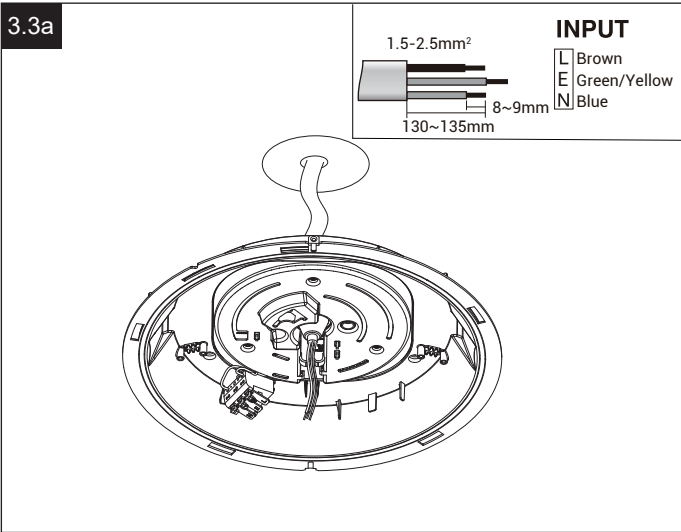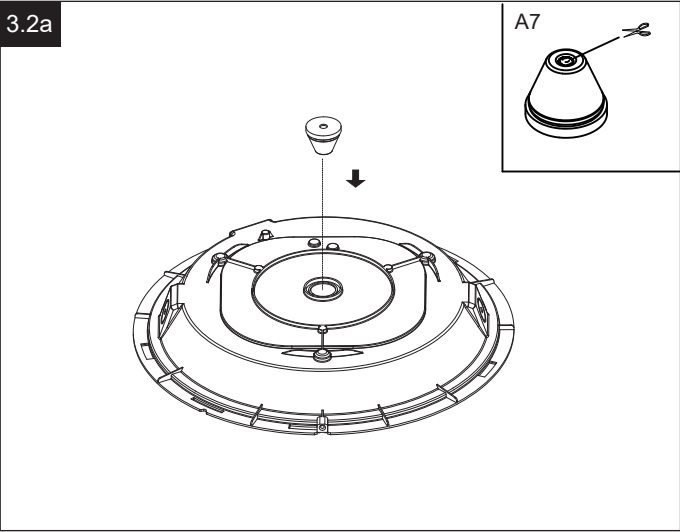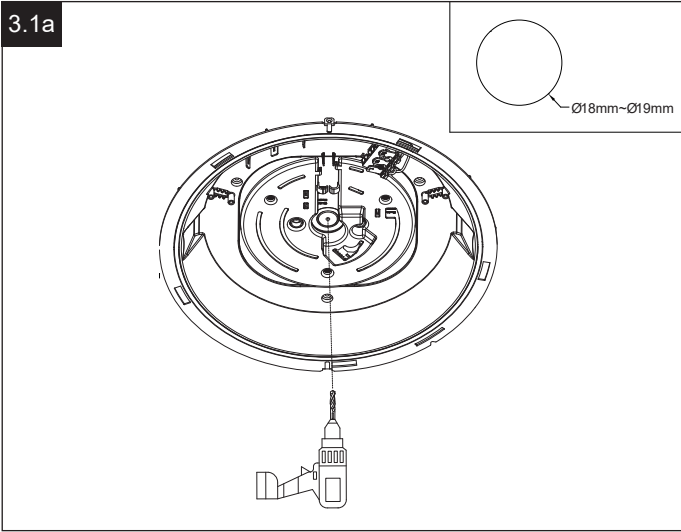

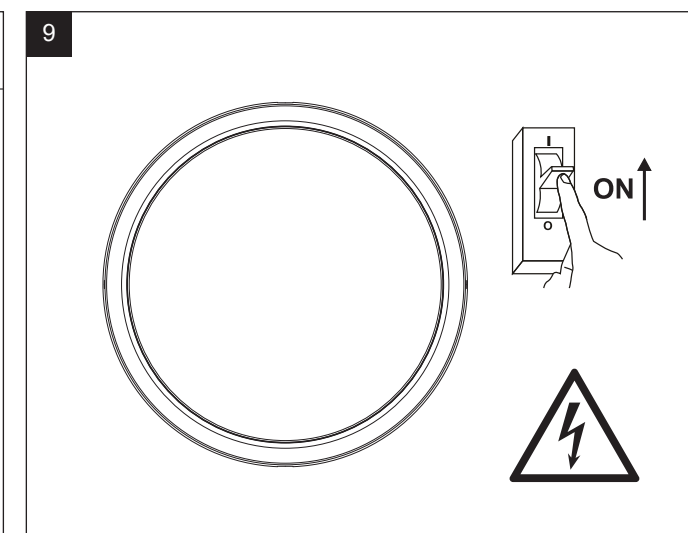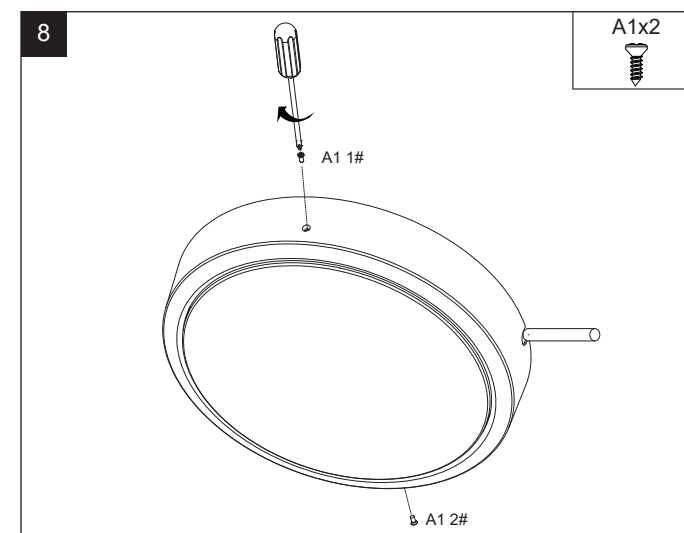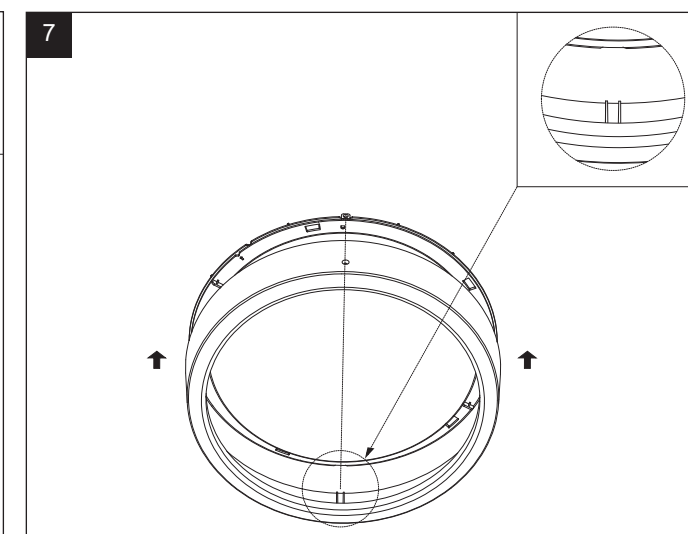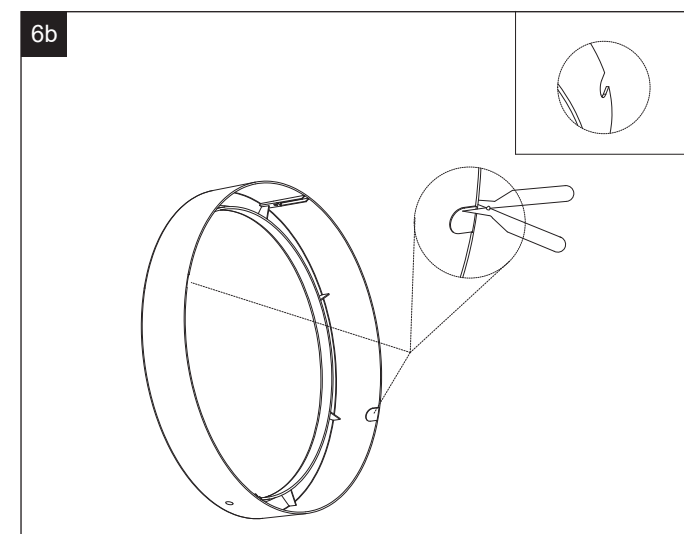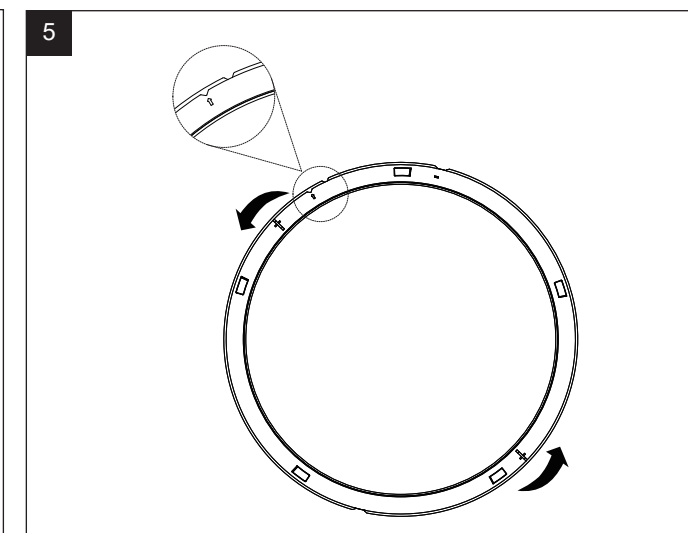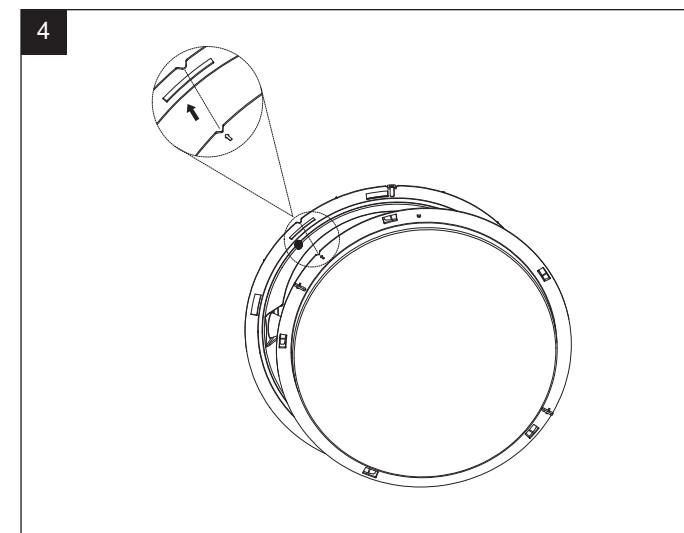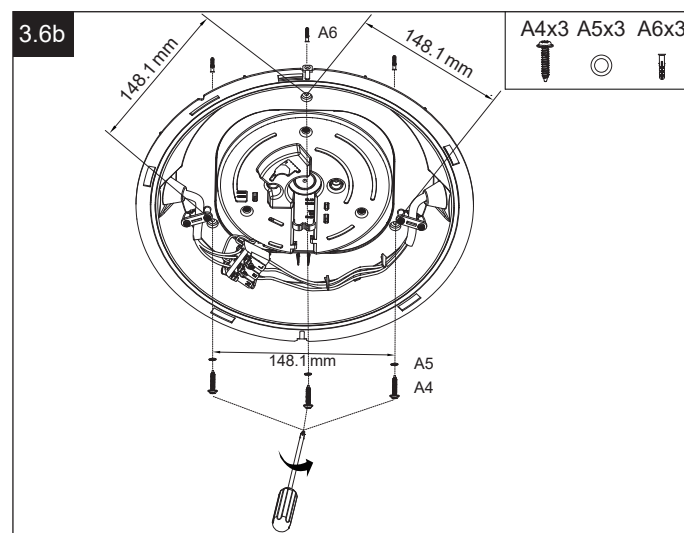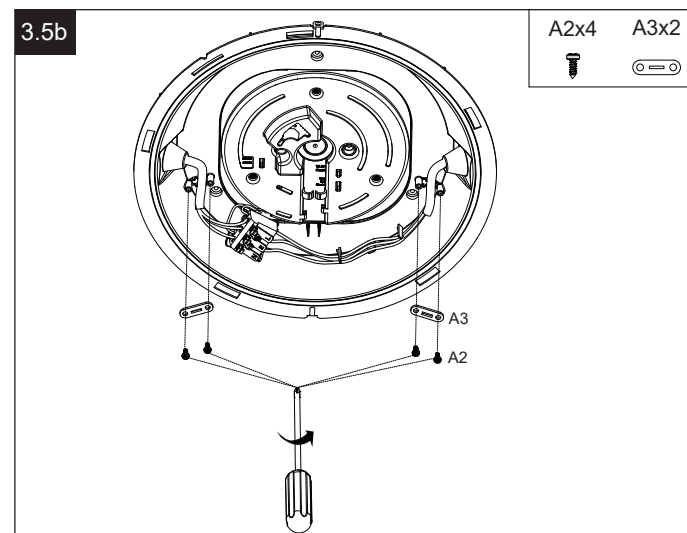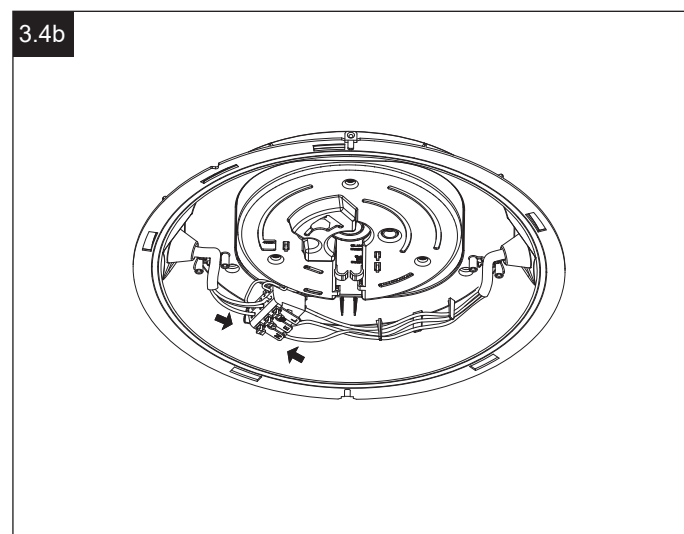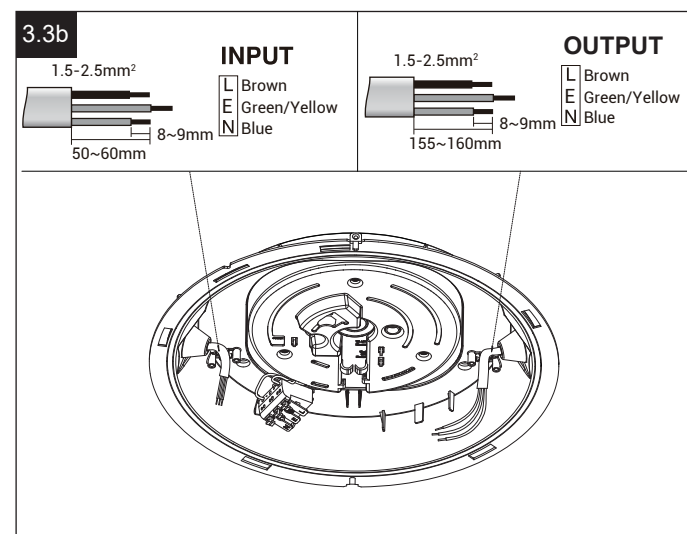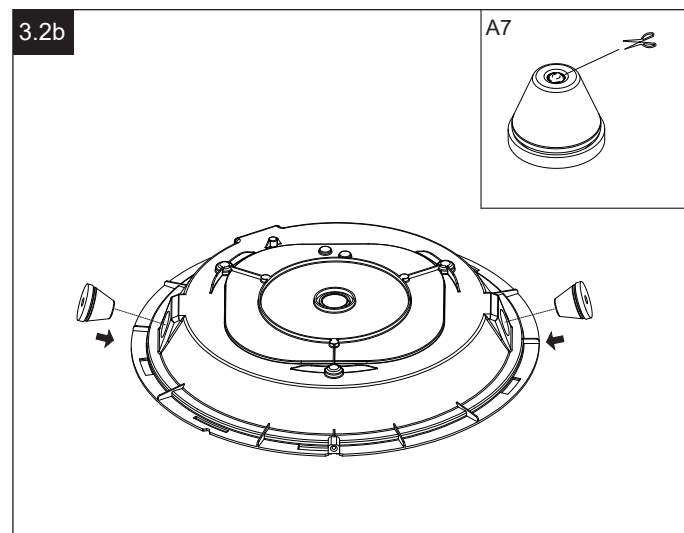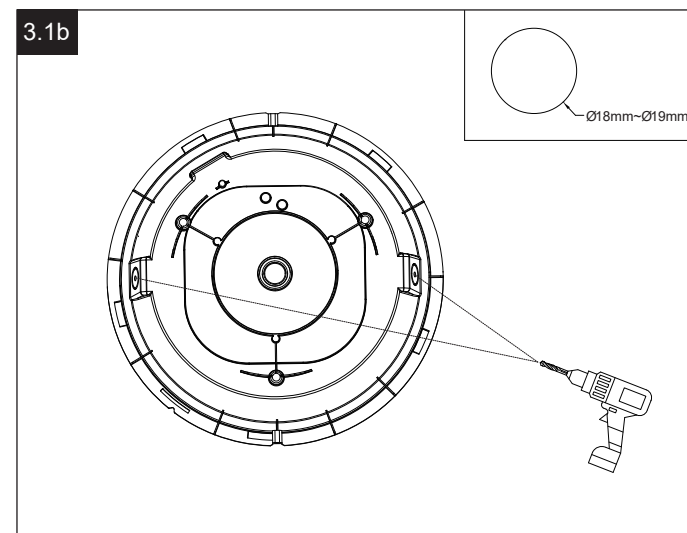

CEOTIS ECLAIRAGE
 23 rue Lavoisier, 75008 Paris France
 email: contact@ceotis.fr
 Tel: +33 (0) 1 43 87 52 04